



LR-NR

9V LoRa™ Tap Timer Watering & Misting

Take a look at our tap timer controller, the LR-NR, now available in LoRa™. Connect your module to a SOLEM gateway and schedule your watering or misting from wherever you are. Save time if you don't have access to the installation location.

Connection



Compatibility



Station

1

Power



Managed via

Remote



INSTALLATION

Coupling: 3/4" BSP thread
Recommended pressure: 7.3–87 psi
Min. flowrate: 0.009 GPM
Max. flowrate: 7.9 GPM
Operating temperatures: 32°F to 122°F
Keep it from freezing in the winter

OPERATION

Power: 6AM6 or 6LR61 9V Alkaline battery
Bluetooth® Smart 4.0 Low Energy
LoRa™ radio communication
Requires a Wi-Fi or 4G gateway
Permanent programming save

DIMENSIONS

Width: 4.5 in
Height: 5.7 in
Depth: 2.4 in

3-year
WARRANTY



LR-NR

9V LoRa™ Tap Timer, Watering & Misting



Quick & Easy Install

Screw the LR-NR onto your garden tap. Connect it via Bluetooth® using the MySOLEM app, pair it to a Wi-Fi or 4G gateway, and your product is ready to use!



Ideal for private residences, balconies and terraces

Connect your module to a SOLEM gateway to access the product remotely and save time when you don't have access to the installation site.



Up to a 5-Year Battery Life

Enable Eco Mode during winter and throughout the watering season to maximize 9V battery life. Receive alerts when the battery is low for simplified maintenance.



Watering / Misting Mode

Using the MySOLEM app, instantly switch from watering mode to misting mode.




Robust & Weatherproof

The LR-NR is reinforced with a new brass ring, screwed directly onto the tap nose for a sturdy and lasting fit.




Remote Management

Paired with a Wi-Fi or 4G gateway, program the LR-NR from wherever you are via the MySOLEM app and platform.

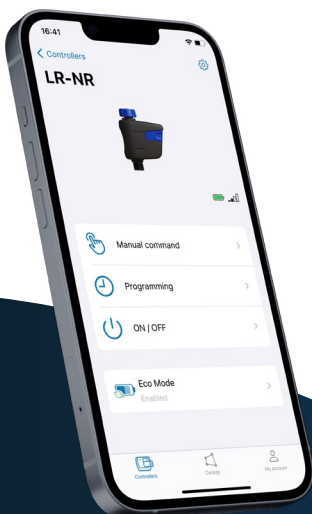

Install. Program. It's ready.

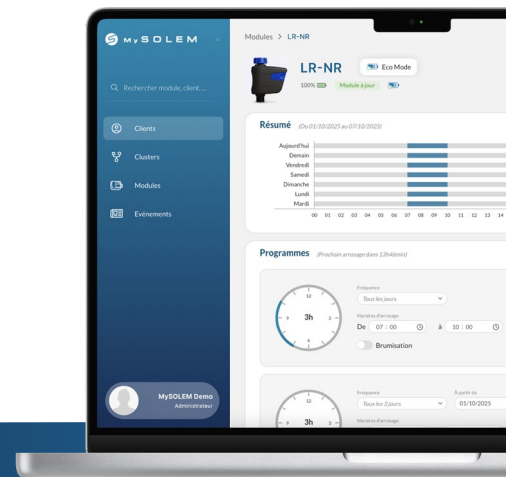

For professionals, discover additional features on our free **MySOLEM.com** platform.